


REFLECTANCE METER PHOTOVOLT “577-PC”

The Photoelectric reflectance meter is easy to operate equipment to determine the whiteness and Opacity of the paper, cardboard, textiles, ceramics, plastics, According to several standards ASTM -TAPPI...

Compatible with LYNX System:

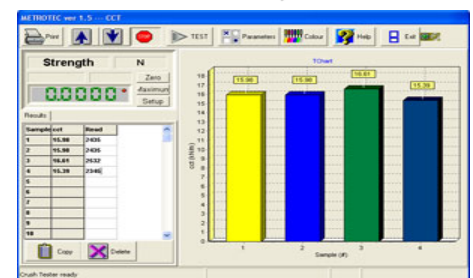

Model 577-PC is able to have reflectance readings in percent directly from the sample, using any other Optic Templates of Photovolt. .

Unlike previous models, **model 577-PC** will automatically reconfigure itself for changes in search unit filters. **SEARCH UNIT** by pressing a button. Other features:

- Automatic **gain control**
- External** power supply
- CE-compliance**
- Dark Current (Black Cavity)** Memory, up to three filters tristimulus
- Calibration reflectance memory up to tristimulus
- Standard plates memory up to three filters.
- “Hold”** function of obtained reading
- Control of the lamp **ON/OFF**

Is an easy to operate equipment, accurate in the laboratory as well as in the production line.

Optional Accesories:

- RS-232 serial port
- WHITENESS MEASURE “W” HEAD
- OPACITY MEASURE “Y” HEAD (using tri-stimulus Filters)
- WHITENESS STANDARD 71-75 %
- WHITENESS STANDARD 76-80 %
- WHITENESS STANDARD 81-85 %
- WHITENESS STANDARD 86-90 %

Electrical: 110-120 VAC / 220-240 VAC

Analog Output: 0 – 1 Volts

Dimensions:127 x 254 x 305 mm (Height x Width x Length)

Weight: 5 Kg